

T2 / Wiegand Proximity Readers (125KHz)



PXR-50ET/W



PXR-52ET/W K



PXR-54ET/W K




PXR-62ET/W

Features

- 125KHz Frequency
- Weather proof and dust proof
- Sensors for real time alarms
- With or without keypad versions available

PXR-62 Easy Installation

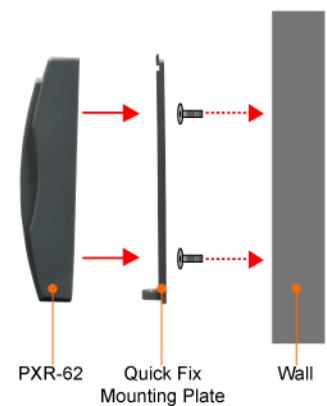

Model No. Identification:

E: EM T: ABA-Track 2 W: Wiegand 26 K: Keypad

Ordering Information

PXR-50ET	T2 interface												
PXR-50EW	Wiegand interface												
PXR-52ET	T2 interface												
PXR-52EW	Wiegand interface												
PXR-52ETK	T2 interface, with keypad												
PXR-52EWK	Wiegand interface, with keypad												
PXR-54ET	T2 interface												
PXR-54EW	Wiegand interface												
PXR-54ETK	T2 interface, with keypad												
PXR-54EWK	Wiegand interface, with keypad												
PXR-62ET	T2 interface												
PXR-62EW	Wiegand interface												
Package Content :	<ul style="list-style-type: none"> ■ Quick Start Guide ■ Accessory pack with screws and hex key wrench 												
Color	<table border="0"> <tr> <td colspan="2">PXR-52XX</td> <td colspan="2">PXR-62XX</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Ivory</td> <td>Light Grey</td> <td>Dark Grey</td> <td>Dark Grey & Silver</td> </tr> </table>	PXR-52XX		PXR-62XX						Ivory	Light Grey	Dark Grey	Dark Grey & Silver
PXR-52XX		PXR-62XX											
Ivory	Light Grey	Dark Grey	Dark Grey & Silver										

Specifications

PXR-	50ET/W	52ET/W K	54ET/W K	62ET/W
Format	EM	EM	EM	EM
Frequency	125KHz	125KHz	125KHz	125KHz
Interface	T2 / Wiegand	T2/Wiegand	T2/Wiegand	T2/Wiegand
Input ports	0	1	1	1
Alarm	NO	YES	YES	YES
Reading Range	6~8cm (max.)	15cm (max.)	20cm (max.)	15cm (max.)
Power/Status LED indication	YES	YES	YES	YES
LCD Display	NO	NO	NO	NO
Keypad	NO	NO / YES	NO / YES	NO
Operating Voltage	DC12V	DC12V	DC12V	DC12V
Power consumption	1.5W	1.5W	1.5W	1.5W
Dimension (mm)	44 x 95 x 16	120 x 76 x 23	127x127x24	120 x 74 x 27
	WxLxH(mm)	WxLxH(mm)	WxLxH(mm)	WxLxH(mm)
Weight	55g	130g	200g	130g

Model No.	Q'ty/Carton	NW(kg)	GW(kg)	Cu.Ft.
PXR-50	25	6.5	7.5	1.72
PXR-52	25	6.75	7.75	1.72
PXR-54	20	7.2	8.2	1.72
PXR-62	25	6.5	7.5	1.72