

T2 / Wiegand Proximity Readers (13.56MHz)



PXR-52MT/K



PXR-52MW/K



PXR-62MT




PXR-62MW

Features

- 13.56MHz Frequency, Mifare format
- Weather proof and dust proof
- Provide alternative setting to access serial number or block data of Mifare card.
- Sensors for real time alarms
- With or without keypad versions available

Model No. Identification

PXR-52ESK

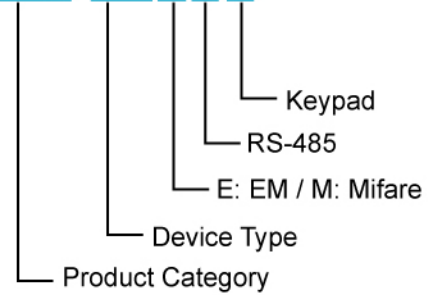

Ordering Information

PXR-52MT	T2 interface															
PXR-52MW	Wiegand interface															
PXR-52MTK	T2 interface, with keypad															
PXR-52MWK	Wiegand interface, with keypad															
Package Content:	<ul style="list-style-type: none"> ■ Quick Start Guide ■ Accessory pack with screws and hex key wrench 															
Color	<table border="0"> <tr> <td colspan="3">PXR-52XX</td> <td colspan="2">PXR-62XX</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Ivory</td> <td>Light Grey</td> <td>Dark Grey</td> <td>Dark Grey</td> <td>Dark Grey & Silver</td> </tr> </table>	PXR-52XX			PXR-62XX							Ivory	Light Grey	Dark Grey	Dark Grey	Dark Grey & Silver
PXR-52XX			PXR-62XX													
Ivory	Light Grey	Dark Grey	Dark Grey	Dark Grey & Silver												

Model No.	Q'ty/Cartron	NW(kg)	GW(kg)	Cu.Ft.
PXR-52	25	6.75	7.75	1.72
PXR-62	25	6.5	7.5	1.72

Specifications

PXR-	52MT/K	52MW/K	62MT	62MW
Format	Mifare	Mifare	Mifare	Mifare
Frequency	13.56KHz	13.56KHz	13.56KHz	13.56KHz
Interface	T2	Wiegand	T2	Wiegand
Input ports	1	1	1	1
Alarm	YES	YES	YES	YES
Reading Range	5cm (max.)	5cm (max.)	5cm (max.)	5cm (max.)
Power/Status LED Indication	YES	YES	YES	YES
LCD Display	NO	NO	NO	NO
Keypad	NO / YES	NO / YES	NO	NO
Operating Voltage	DC12V	DC12V	DC12V	DC12V
Power consumption	1.5W	1.5W	1.5W	1.5W
Dimension (mm)	120 x 76 x 23	120 x 76 x 23	120 x 74 x 27	120 x 74 x 27
	WxLxH(mm)	WxLxH(mm)	WxLxH(mm)	WxLxH(mm)
Weight	130g	130g	130g	130g